

Part Number:
KXA00091

Models:
BSVI Classic
With VIN starting ME3J3A5FAL3



WARNING: Royal Enfield genuine accessories are designed to fit only the specific Royal Enfield motorcycle(s) that are specified above. They should not be fitted to any other type of motorcycle. Pay particular attention to the warnings and cautions contained in this instruction, failure to do so may result in an incorrect installation of the accessory which could result in an unsafe riding condition and possible accident. If in any doubt always seek help from your authorised Royal Enfield dealer.



WARNING: Before starting any accessory kit installation ensure the motorcycle is supported in a stable condition. Failure to support the motorcycle correctly could lead to motorcycle damage or personal injury.




WARNING: All fixings must be tightened to the torque values specified in this instruction. Failure to tighten fixings to the correct torque could result in an unsafe riding condition and possible accident.




CAUTION: Care should be taken when fitting any accessory kit. Incorrect handling of kit components or the use of incorrect tools could lead to component or motorcycle damage.


NOTE: The content of this instruction is subject to change at any time without notice or liability. Royal Enfield reserves the right to revise the information presented at any time.

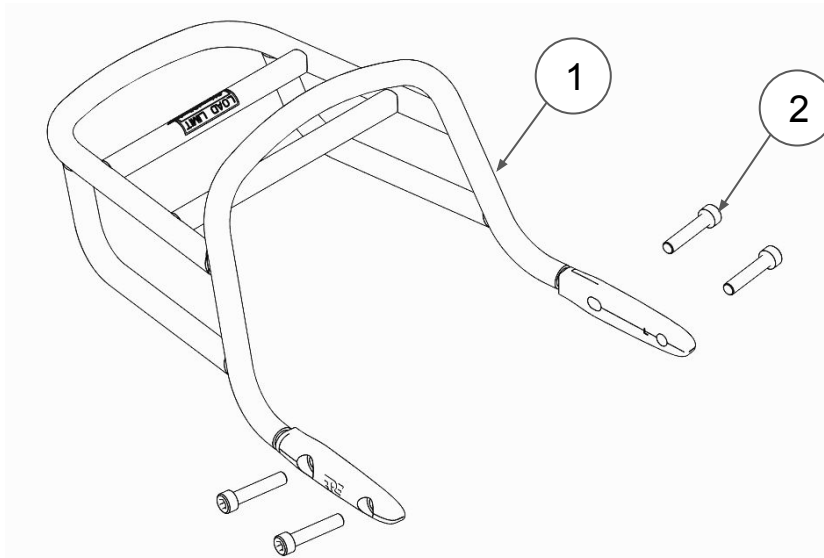


Item	Description	Qty
1	Rear rack	1
2	Bolt, Cap, M8 X 40	4

1 Remove the 4 quantities of Bolt, cap, M8 X 40 (4) and remove grab rail (3) then retain both for refitment.

	6mm Hexagonal socket wrench
--	-----------------------------

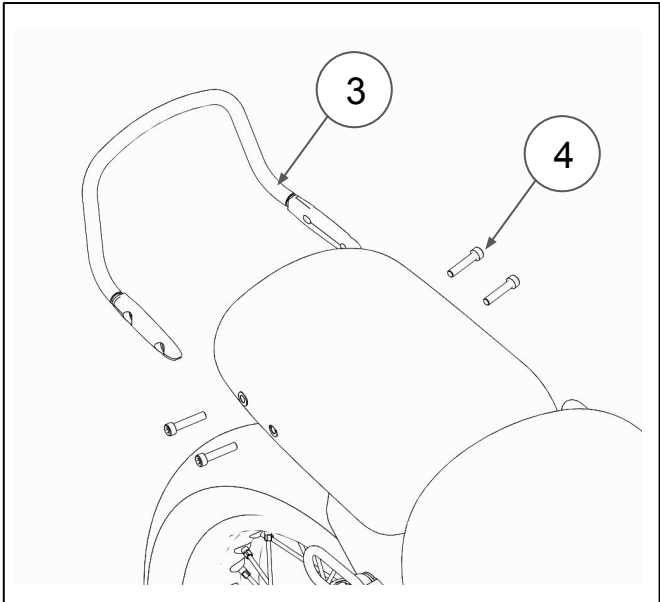


2 Ensure the large sleeves (5) assembled in rear mount holes and small sleeves (6) assembled in front mount holes.

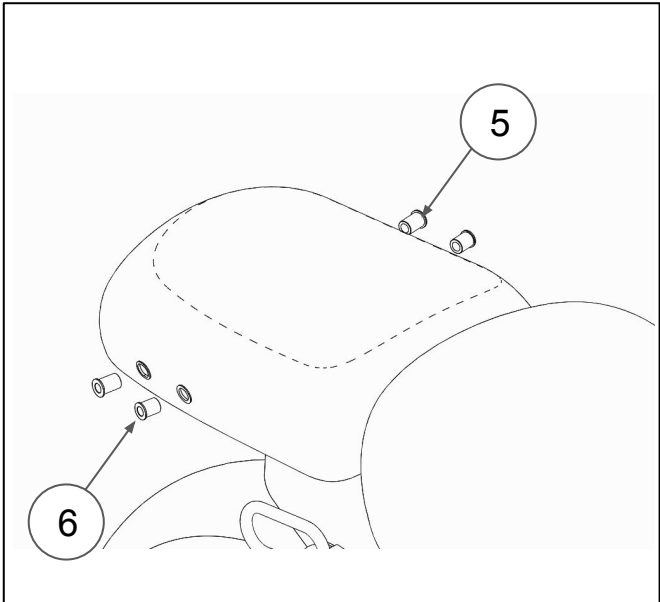

3 Assemble the Rear rack (1) with 4 quantities of Bolt, cap, M8 x 40 (2). Tighten the bolts to **30 Nm**.

	6mm Hexagonal socket with torque wrench.
--	--

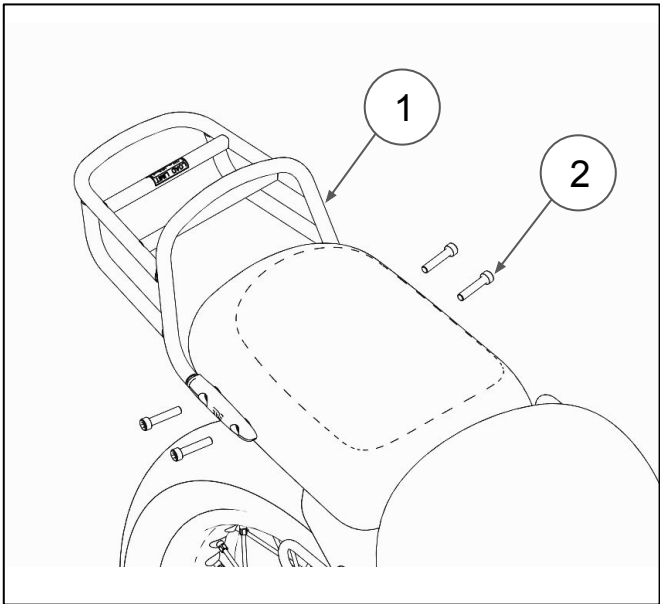



WARNING: After fitting any genuine Royal Enfield accessory always ride the motorcycle with caution and allow time to become familiar with any change in the motorcycle handling characteristics. Failure to become familiar with any change in the motorcycle handling characteristics may cause the motorcycle to become unstable and result in an accident.



WARNING: Never overload the Rear rack, the maximum safe load for rear rack is 3 Kg. (6.6 lbs.). Incorrect loading of the rear rack could cause the motorcycle to become unstable and result in an accident.



WARNING: The fitment of Rear rack to the motorcycle will affect the stability and handling of the motorcycle. Failure to observe the changes in motorcycle stability and handling characteristics could result in an accident.