





Part Number:
KXA00417

Models:
Himalayan (452cc only)

- 


WARNING: Royal Enfield genuine accessories are designed to fit only the specific Royal Enfield motorcycle(s) that are specified above. They should not be fitted to any other type of motorcycle. Pay particular attention to the warnings and cautions contained in this instruction, failure to do so may result in an incorrect installation of the accessory which could result in an unsafe riding condition and possible accident. If in any doubt always seek help from your authorised Royal Enfield dealer.
- 

WARNING: Before starting any accessory kit installation ensure the motorcycle is supported in a stable condition. Failure to support the motorcycle correctly could lead to motorcycle damage or personal injury.
- 

WARNING: All fixings must be tightened to the torque values specified in this instruction. Failure to tighten fixings to the correct torque could result in an unsafe riding condition and possible accident
- 

CAUTION: Care should be taken when fitting any accessory kit. Incorrect handling of kit components or the use of incorrect tools could lead to component or motorcycle damage.
- NOTE:** The content of this instruction is subject to change at any time without notice or liability. Royal Enfield reserves the right to revise the information presented at any time.

Parts Supplied: KXA00417

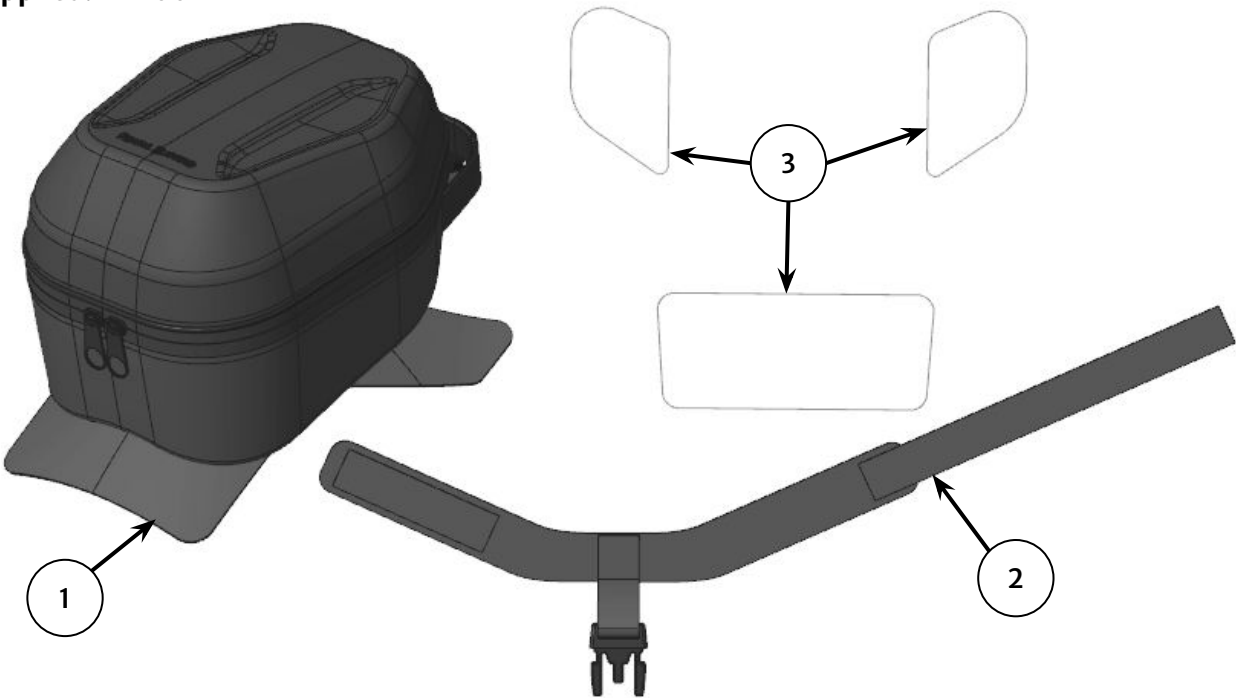

Item	Description	Qty
1	Tank bag	1
2	Harness	1
3	Paint protection film	1
4	Degreaser wipe (not shown)	1



WARNING: The maximum safe load for the bag is 1kg (2.2 lbs). Never exceed this loading limit as this may cause the motorcycle to become unstable and could lead to motorcycle damage or personal injury.



WARNING: Always ensure the mounting straps are correctly tensioned before riding the motorcycle. Failure to tighten the straps could result in an unsafe riding condition and possible accident.



CAUTION: Use of chemicals or high-pressure spray washers is not recommended for cleaning and may damage the bag. To help maintain its appearance, clean the bag using a sponge or cleaning cloth with low alkaline soap and water.




WARNING: After fitting any genuine Royal Enfield accessory always ride the motorcycle with caution and allow time to become familiar with any change in the motorcycle handling characteristics. Failure to become familiar with any change in the motorcycle handling characteristics may cause the motorcycle to become unstable and result in an accident.

1 Place the motorcycle on it's side stand. Collect the harness from the kit and wrap around the headstock (1) as shown with the webbing loop and buckle facing the rear of the bike (2). The harness is secured with a velcro attachment (3).

Setting the handlebars to full right lock will aid with access.


Note: The minimum application temperature for the paint protection film is 15°C.

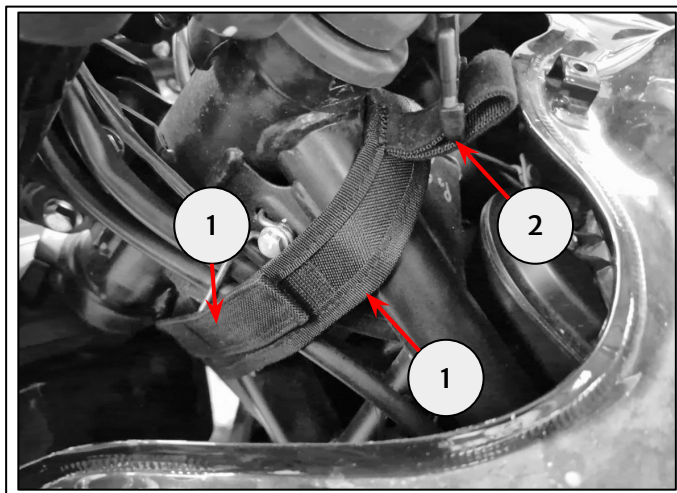

2 Carefully locate the tank bag onto the fuel tank in order to provide guidance on the location of the magnets. Remove the tank bag.

Using the supplied cleaning wipe, clean the fuel tank in the areas highlighted (1).


Wipe dry with a microfibre cloth.

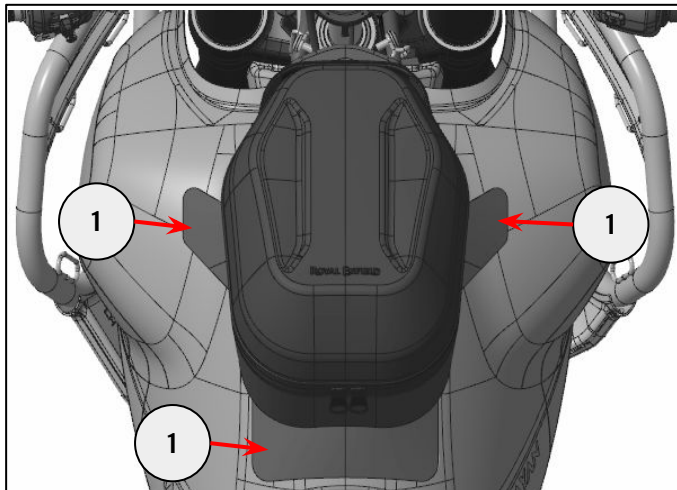

3 Peel the backing paper and apply the paint protection film to the magnet contact areas (1).

Apply firm and even hand pressure across each film surface, starting from the centre to avoid air traps. Hold for one minute to make sure a good bond is achieved.

Full bonding is achieved after 24 hours in an ambient temperature between 15°C and 30°C.

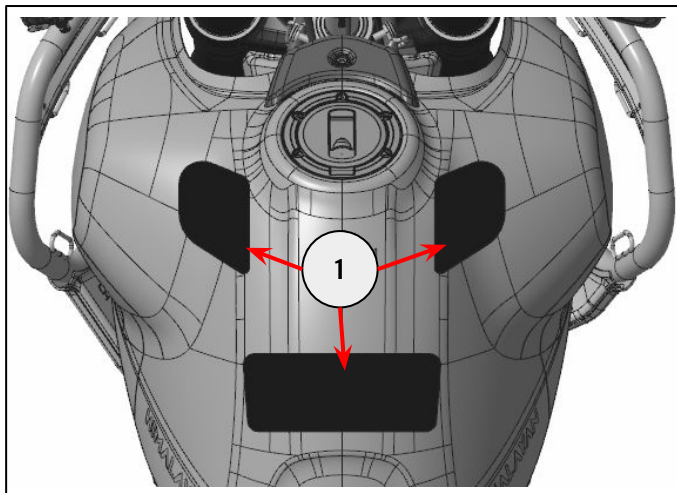

4 Attach tank bag to the fuel and engage the front safety buckle (1). Conduct a full left to right handlebar sweep to ensure sufficient clearance to the tank bag.

